


Total security transfers suction, discharge and filling

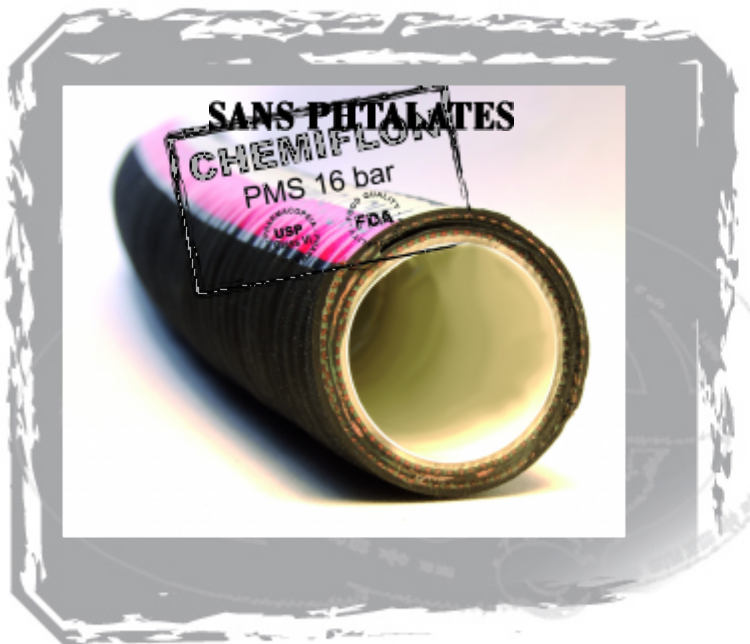

**ATEX certified by INERIS.**

**Hose for suction and discharge for the transfer of chemicals, solvents and most aggressive pure alcohol.**

Protected by a patent tube CHEMIFLON has an inner sleeve made of extruded fluoropolymer of the last generation with **exceptional resistance to oxidation, temperature and deformation** usually caused by constant use dynamic loading. It is extremely smooth inner liner and a waterproof incomparable with other fluoropolymers.

### Caractéristiques techniques :

**Inner tube:**

White gloss sheath MFAMIRROR approved USP CLASS V and FDA 23. Resistant to high temperatures, stress cracking, the repeated bending and oxidation.

**Reinforcement:**

High strength synthetic textile, metal coil and copper braids.

**Siding:**

Black antistatic EPDM with a marking band bicolor red and white longitudinal. UV resistant and abrasion.

**Temperature:**

-50 °C to +170 °C (depending on the nature of the product transferred)

### Spécifications techniques :

**Pressure resistance (bar): 16**

**Safety factor: 4**

**Suitable for vacuum (mmHg): 900**

**Maximum length (m): 20**

Diameter	RC (mm)	Weight (Gr/m)
13x25	80	600
19x32	115	800
25x38	150	950
32x45	190	1200
38x51	230	1500
51x66	300	2200

Usual fittings \*(male or female):



This dismounting pipe may be crimped, shelled, or necklace.

The various assemblies are available in standard or aseptic.

Any other type of connection on request.

We reserve the right to modify our products and ranges at any time to improve them.