



Available with or without spiral cladding with corrugated or smooth sliding

Suction and discharge of any food product - Free of release



Very flexible and robust nature characterized by its particularly smooth inner tube and completely waterproof.

The Multifood B transfers including **high temperature** while thick or delicate food and any beverage with alcohol containing 96%.

Standards and Approvals: European Union regulations CE n° 1935/2004

Caractéristiques techniques :

Inner tube:

Butyl rubber white (FDA approved), smooth, glossy MIRROR. Resistant to animal and vegetable fats, detergents and common disinfectants.

Reinforcement:

Two spirals steel embedded in the wall and high-strength synthetic textile.

Siding:

EPDM rubber, canvas side, blue with white longitudinal markings. Resistant to abrasion, ozone, weather, oils, detergents and all common disinfectants. Odorless and tasteless.

Temperature:

-40 ° C to + 120 ° C, peak at 130 ° C in the vapor phase (open circuit) for 1/2 hour maximum.

Spécifications techniques :

Pressure rating: (bar): 10


Safety factor: 3

Suitable for vacuum (mmHg): 680

Maximum length (m): 40

Diamètre	RC (mm)	Poids (Gr/m)	Diamètre	RC (mm)	Poids (Gr/m)
19x31	80	670	50x64	250	1820
25x37	120	870	63.5x80.5	360	2810
32x44	150	1030	75x91	450	3170
38x52	200	1470	102x120	600	4460

Raccords usuels (mâle ou femelle) :

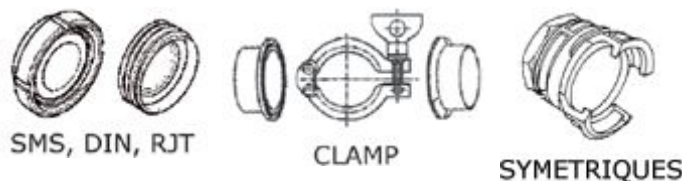

Le montage coté tuyau pourra être serti, à coquilles, avec collier ou à dudgeonner.

Les différents montages sont proposés en version standard ou aseptique.

Tout autre type de raccord sur demande.

Nous nous réservons le droit de modifier nos produits et nos gammes à tout moment afin de les améliorer.