


Are on request with different inner tubes NR beige, black 40sh NR + / -5, Food, EPDM, EPM or CSM

Suction and discharge of abrasive

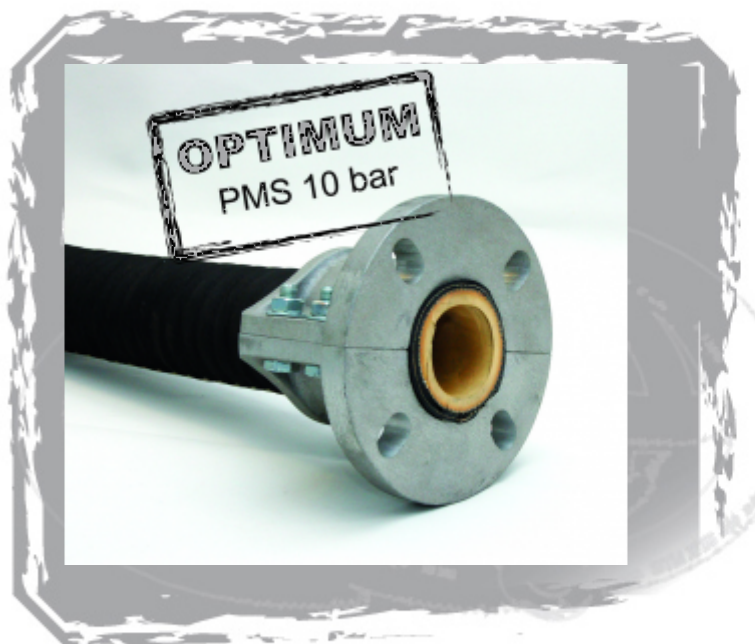

**Pipe with ahighabrasion resistance**for the transfersuction pressure orabrasive products.

Suitable forpneumatic and/or hydraulic.

This hosecan be equipped withconnection 1/2aluminum shells,clampingboltorflange manufacturewithrubberheel.

### Caractéristiques techniques :

**Inner tube:**

RubbermixtureNR/BRblacksmooth, antistatic,abrasion,hardness:60 +/-5Sh.A.

**Reinforcement:**

Synthetic textile sheetswithembeddedmetal spiraland twocross-sonmassfor dissipatingstatic electricity.

**Siding:**

EPDM rubber,black, wavyappearanceBande,antistatic

**Temperature:**

-30 °Cto +70°C,peakat 80°C.

### Spécifications techniques :

**Pressure resistance(bar):10**

**Safety factor:3**

**Suitable for vacuum(mmHg):650**

**Maximum length (m):40mup to DN 150**

**12 mbeyond**

**Longer thanondemand based onDN**

Diameter	Thickness	RC(mm)	Weight(Kg/m)
40x67	7	200	2.80
50x77	7	250	3.30
65x92	7	300	4.20
80x107	7	400	4.95
100x128	7	500	6.60
125x155	7	650	8.60
150x180	7	900	10.10
200x232	5.5	1400	14.80
254x289	5.5	2000	19.60
305x343	5.5	2400	26.80

Usual fittings \*(male or female):



A BRIDES

We reservethe right to modifyour products andrangesat any timeto improve them.