


# "CLAMP" COUPLINGS



## COUPLINGS

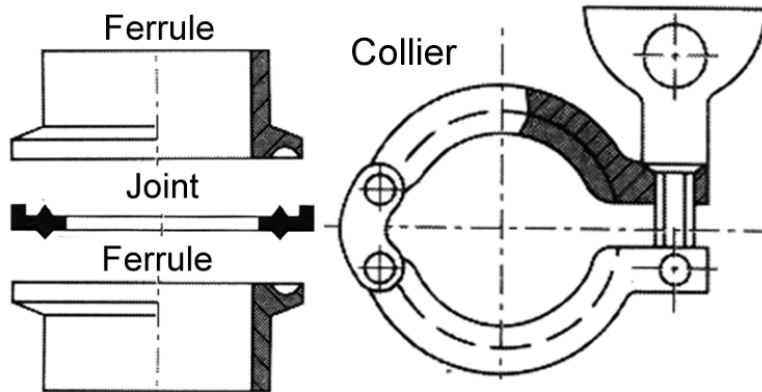

Diameters :	25	38	51	63,5	76	104
Application pressure (bars for 20°C water) :	40	34	35	38	38	32

## SEALS

Material :	BUNA	EDPM	SILICONE	FPM	TEFLON
Temperatures :	80°C	150°C	230°C	180°C	200°C

## USUAL CONNECTIONS

depending on the hose type and its application, various fitting assembly techniques are supplied:

<p><b>CRIMPED</b></p> <p><b>ASEPTIC</b></p>	<p><b>CLAMPING PLATE</b></p> <p><b>ASEPTIC</b></p>	<p><b>THERMOFORMED</b></p> <p><b>ASEPTIC</b></p>	<p><b>CLAMPING BAND</b></p> <p>Type "BAND-IT" ou à TOURILLONS</p>
---	--	--	---

The coupling can also be **WELDED** (for métalflex hoses for example).

