


OPTIMUM black Para 60+/-5 Sh A

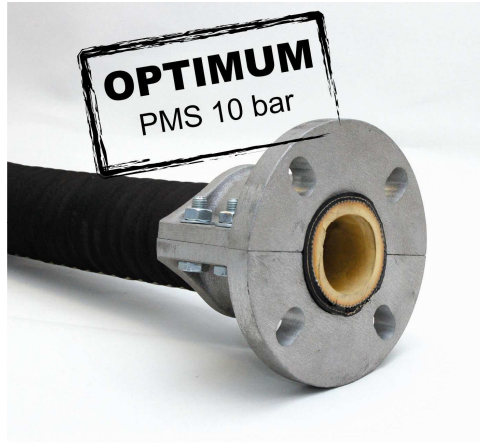


APPLICATIONS - ADVANTAGES


Suction/Delivery hose for abrasives


Can be supplied, upon request, with different inner tubes. NR beige. NR black, food, EPDM, EPM.

High abrasion resistance for suction/delivery of abrasives products under pressure. Can be used for pneumatic and or hydraulic circuits.

HOSE DESCRIPTION

- 

Mixed rubber NR/BR smooth antistatic black (R<10 Ω6), abrasion resistant. Hardness : 60+/-5 Sh A.
- 

Synthetic textile plies with embedded steel helix and 2 cross layouts to dissipate static electricity.
- 

Black EPDM rubber, waved aspect antistatic (R<10Ω6)



Working temperature: **from -30°C up to +70°C** . Peak at 80°C.

TECHNICAL SPECIFICATIONS CHEMICALS PRODUCTS

Diameter	Working Pressure (bar)	Weight (g/m)	RC (mm)
40 x 67	10	280	200
50 x 77	10	330	250
65 x 92	10	420	300
80 x 107	10	495	400
100 x 128	10	660	500
125 x 155	10	860	650
150 x 180	10	1010	900
200 X 232	10	1480	1400
254 x 289	10	1960	2000
305 x 343	10	2680	2400

Safety coefficient : 3
Vacuum (mmHg) : 650

Maximum length : 40 M up to Diameter 150
12 M above diameter 150

We reserve the right to modify our products at any moment to improve them.

